


SYMBOLS

- Work area
- Sign on portable or permanent support
- Barricade or drum
- Cone, drum or barricade
- Type III barricade

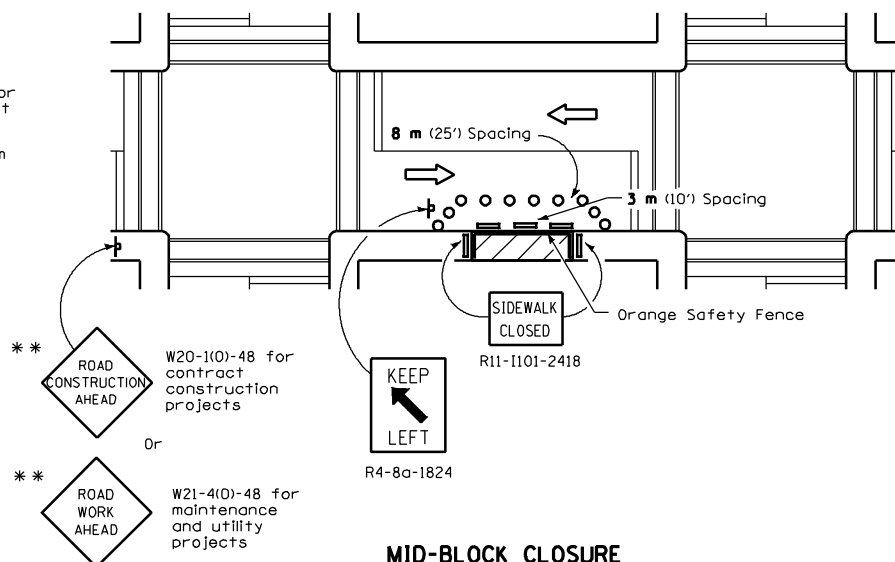

GENERAL NOTES

Where, at any time, pedestrian traffic must be rerouted due to work being performed.

The SIDEWALK CLOSED / USE OTHER SIDE sign shall be placed at the nearest crosswalk or intersection to each end of the closure. Where the closure occurs at a corner, the signs shall be erected on the corners across the street from the closure. The SIDEWALK CLOSED signs shall be used at the ends of the actual closures.

Type III barricades and R11-2-4830 signs shall be positioned as shown in "ROAD CLOSED TO ALL TRAFFIC" detail on Standard 702001.

* May be used when applicable



R11-1102-2430

** Omit whenever duplicated by road work traffic control.

All dimensions are in millimeters (inches) unless otherwise shown.

Illinois Department of Transportation	
APPROVED January 1, 1998	ISSUED 1-1-97
ENGINEER OF OPERATIONS	
APPROVED January 1, 1998	
ENGINEER OF DESIGN AND ENVIRONMENT	

DATE	REVISIONS
1-1-98	Added 48" dim. to W sign design., orange safety fence & barricade sym.
1-1-97	Renum. Standard 2405.
	Deleted orange flags.
	Deleted DN symbol.

LANE CLOSURE MULTILANE 1W OR 2W CROSSWALK OR SIDEWALK CLOSURE FOR SPEEDS < 45 MPH

STANDARD 701801-01